
sainas DigsA

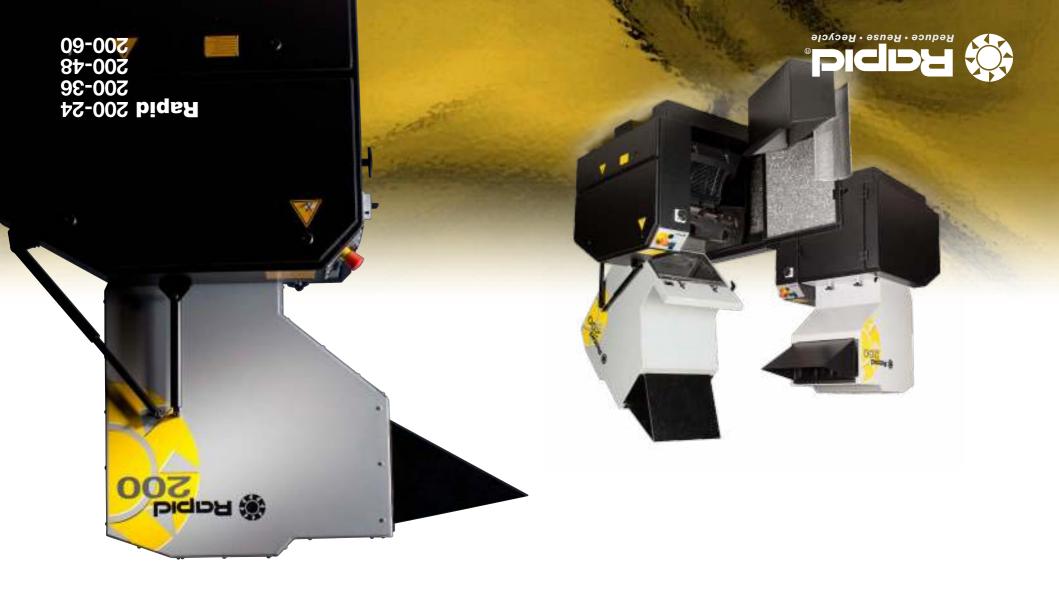

performance – Sm

The all new Rapid 200 Series of granulators is ideal for the direct recycling of plastic waste and rejects primarily from injection- and blow moulding processes.

With Rapid's full choice of configuration alternatives, including four different machine sizes with cutterhouse openings up to 600×230 mm, different rotor types and rotor speeds, discharge systems etc allow you to select the granulator best suited to your type of plastic waste, throughput volume, granule size and direct recycling requirements.

Super-Tangential cutterhouse

The Rapid 200-series comes with the super-tangential cutter house that is tailored for lightweight bulky products such as bottles, containers and injection moulded parts. It is effectively gripping and cutting the parts to prevent them from bouncing on the rotor.

The granulator has an improved design with respect to access which drastically reduces machine downtime and improves productivity when cleaning or performing maintenance.





High quality regrind

The consistently smooth and clean cutting action provides high quality regrind over time.

Constant Cutting Circle, CCC

The Rapid Constant Cutting Circle and unique, integrated rotating shaft end-plates of the cutter assembly eliminate frictional heat and minimize dust and fines.

Excellent gripping of bulky goods

The new improved Super-Tangential cutterhouse design grips even large voluminous light weight products with ease.

Minimal energy consumption

The configuration of the rotor blades and low rotation speed combine to minimize energy consumption.

Quick knife changing

Rapid access to the cutterhouse, and cassette knives for the staggered rotor design or preadjustable knives for the open rotor configuration make knife changing quick and easy.





Heavy duty transmission

Heavy duty transmission provides powerful and at the same time energy saving granulation due to the flywheel effect

Less energy required with optimized rotor speeds

The 200 Series is offered in three different rotor speeds, 260, 400 or 840 rpm, assuring the most effective configuration related to the application. Choosing the optimal



Highest-quality regrind

The Rapid cutting technique, comprised of clean scissors-cutting action and constant cutting circle, produces granules of a uniform size with minimal dust content even with the toughest materials.



Super-Tangential cutterhouse

The Rapid 200-series comes with the super-tangential cutter house option that is tailored for lightweight bulky products such as bottles, containers and injection moulded parts. It is effectively gripping and cutting the parts to prevent them from bouncing on the rotor.



Easy removable flaps

The flaps effectively prevent flyback of material. The slide tray makes them easy to pull out for cleaning when changing material or colour.



rotor speed minimizes energy consumption.



Rotor configurations

The Rapid 200 Series comes with either an open or a staggered rotor. Both perform scissors cut providing energy effective granulation.


The open rotor supports presetting of knives, the staggered configuration includes cassette knives, both enabling quick and easy knife changes minimizing downtime for service and maintenance.




Specifications 200-24 200-36 200-48 200-60

| | 200-24 | 200-36 | 200-48 | 200-60 |
|------------------------------------|------------------------------|-----------|-----------|-----------|
| Rotor diam. (mm) | 200 | | | |
| type | Staggered (std), open (opt.) | | | |
| Rotating knives | | | | |
| Staggered configuration | 3×2 | 3×3 | 3×4 | 3×5 |
| Open configuration | 3×2 | | | |
| Rotor speed (rpm) | 260 (opt. 400, 840) | | | |
| Hopper inlet | 240 x 200 | 360 x 200 | 480 x 200 | 600 x 200 |
| Motor, standard, (kW) | 4.0 | 5.5 | 5.5 | 5.5 |
| alternatives, (kW) | 4.0, 5.5, 7.5, 11 | | | |
| Throughput capacity, (up to, kg/h) | 75 | 100 | 150 | 200 |
| Weight (kg) | 500 | 550 | 650 | 750 |


| Features | | | | |
|--|---|-----------------|--|--|
| Cutterhouse configurations: Super-Tangential, Tangential or Precut | | | | |
| Cassette knives | | | | |
| Double scissors cutting action | | | | |
| Heavy duty transmission | | | | |
| Options | | | | |
| PowerTech package, wear resistant execution | | | | |
| Various hoppers for sheets, pipes/profiles, belt conveyor, roll feed | | | | |
| Extra fixed knife, increasing throughput, Tangential | | | | |
| Screen diam. Std/opt. (mm) | 6 | 4/8/10/12/17/25 | | |
| Level indicator | | | | |
| Knife setting jig (for presetting of knives in open rotor configuration) | | | | |

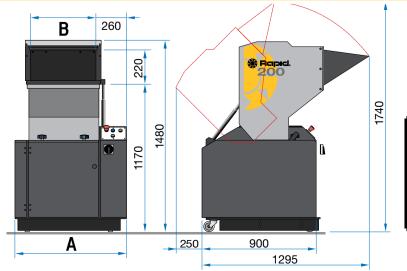

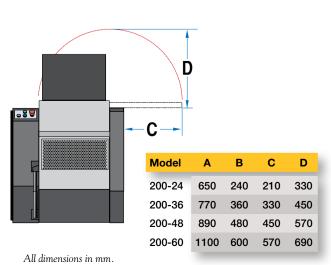


Cutterhouse configurations


The Rapid 200-Series comes in 3 configurations, each with its own purpose.
The Super-T (right) is for example ideal for bulky lightweight goods where gripping is crucial.



Belt conveyor feeding

Robot/Manual







www.rapidgranulator.com

you. With over 70 years of experience, a We are dedicated to partnering with service helps to keep them in top condi-

Rapid strives to exceed your expectaexpertise, our people, and our resources. units installed worldwide, we offer you our global presence, and more than 100.000

market. And our excellent spare parts of the highest quality available on the most ruggedly built, most dependable and Our products are regarded as the

can satisfy virtually all your granulation from table-top units to giant machines, we With an extensive granulator range,

grated recycling solutions for the plastics dividual granulators and completely inte-We develop, manufacture and market in-Rapid is the world leader in granulation.

industry.

tions in recycling plastic waste.



Rapid Granulator AB

Email: info@rapidgranulator.se Phone: +46 370 86500 SE-330 10 Bredaryd, Sweden 4 nəgävirtsubnı ,8 xo8

Rapid worldwide:

Singapore info@rapidgranulator.asia info@rapidgranulator.cn China info@rapidgranulator.it Italy info@rapidgranulator.fr France info@rapidgranulator.de Germany info@rapidgranulator.com ASU

Granulator AB. 2010.01 reserved for change of design without notice.

DICIDE: