


## 1000 SERIES - C1200 INCLINE CONVEYOR



### STANDARD TECHNICAL SPECIFICATIONS

<b>Dimensions</b>	PO: from 1000mm / to 7000mm (50mm increment) UT: from 190mm / to 790mm (50mm increment)
<b>Frame</b>	118x26mm anodised extruded aluminium profile with 10mm T-slots closed by black PVC profile; 40x40mm extruded aluminium joint profiles; Die cast aluminium alloy head supports
<b>Intermediate metal plate</b>	AISI430
<b>Sidewalls</b>	H60mm anodised extruded aluminium profile; On request: H100/160/210mm and H130/180mm 90° bend ed (for PC cover)
<b>Stand supports</b>	Die cast aluminium alloy hinges and clamps; 30x70XH900mm zinc plated steel legs with adjustable height every 30mm with "H" shape base; Ø80mm castors with brake (1 stand support only for conveyor length up to 2000mm);
<b>Idle and drive rollers</b>	Ø60mm extruded aluminium profile
<b>Belt</b>	Petrol green quadrangular pattern PVC, max temperature resistance 100°C in continuous, antistatic
<b>Drive</b>	Direct (left side)
<b>Gear Motor</b>	3 Phase – 400Vac/50Hz – 0.18Kw – asynchronous motor
<b>Speed</b>	3.2m/min.
<b>Load</b>	30kg
<b>Control</b>	IP55, thermal overload protected motor starter (on/off), emergency button, five cores (5x1.5mm) cable length 3000mm flame-retardant

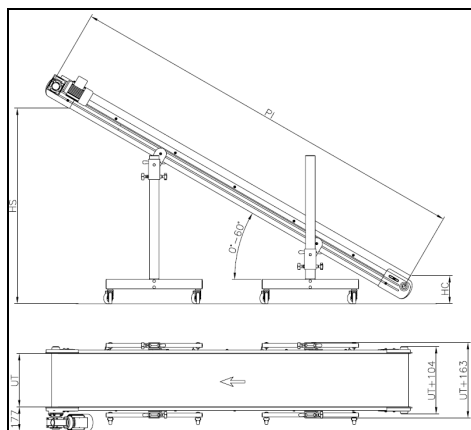

PL MACHINERY SERVICES & SALES LTD  
UNIT A3/A4 BARTON INDUSTRIAL ESTATE, FALDO ROAD,  
BARTON LE CLAY, BEDFORDSHIRE, MK45 4RP

TEL: 01582 883666 / EMAIL: [sales@plmachinery.com](mailto:sales@plmachinery.com)