


C1400 SERIES – HORIZONTAL / INCLINE CONVEYOR

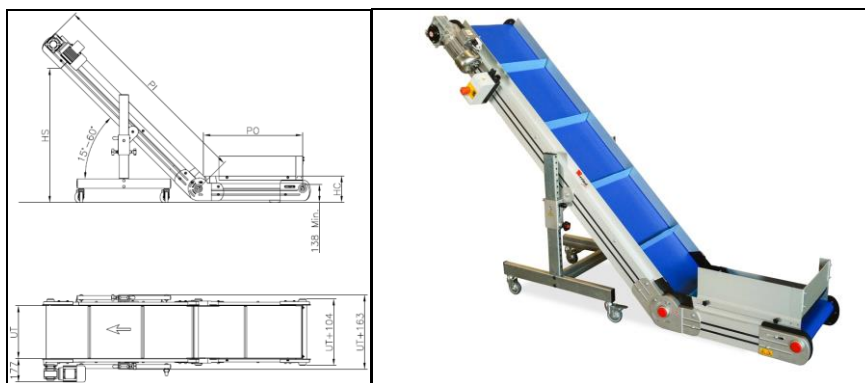

PN	PO	PI	UT	*HS min 15°	*HS max 60°
C1400/750+2000x240	750	2000	240	450	1600
	Horizontal	Incline	Usable Belt Width	Height / min	Height / max

STANDARD TECHNICAL SPECIFICATIONS

Dimensions	PO: from 750mm (50mm increment) PI: from 2000mm (50mm increment) UT: from 240mm (50mm increment) PI incline range: from 15° / to 60° (7.5° increments)
Frame	118x26mm anodised extruded aluminium profile with 10mm T-slots closed by black PVC profile; 40x40mm extruded aluminium joint profile; Die cast aluminium alloy head supports and hinges
Intermediate metal plate	AISI430
Sidewalls	PO: H60mm anodised extruded aluminium profile + H150mm (interchangeable right or left) + H210mm with PU flap (frontal); PI: H60mm anodised extruded aluminium profile; On request: H100/160/210mm and H130/180mm 90° bended (for PC cover)
Stand supports	Die cast aluminium alloy hinges and clamps; 30x70xH630mm zinc plated steel legs with adjustable height every 30mm with "H" shape base; Ø80mm castors with brake and shock absorber supports
Idle and drive rollers	Ø60mm extruded aluminium profile
Belt	RAL 5002 matt blue polyurethane, max temperature resistance 100°C in continuous, antistatic
Cleats	Blue polyurethane, max temperature resistance 100°C in continuous, 15° inclination; H20/35/50mm
Drive	Direct (left side)
Gear Motor	3 Phase – 400Vac/50Hz – 0.18Kw – asynchronous motor
Speed	3.2m/min.
Load	35kg
Control	IP55, thermal overload protected motor starter (on/off), emergency button, five cores (5x1.5mm) cable length 3000mm flame-retardant



PL MACHINERY SERVICES & SALES LTD
UNIT A3/A4 BARTON INDUSTRIAL ESTATE, FALDO ROAD,
BARTON LE CLAY, BEDFORDSHIRE, MK45 4RP

TEL: 01582 883666 / EMAIL: sales@plmachinery.com