


## Y CONNECTOR

Y - Connector with valves, available diameters:  $\varnothing$  50 /  $\varnothing$ 89 /  $\varnothing$ 125

**Standard equipment:**


*Butterfly valve with probe connection*

**For dryer with 2 hoppers**

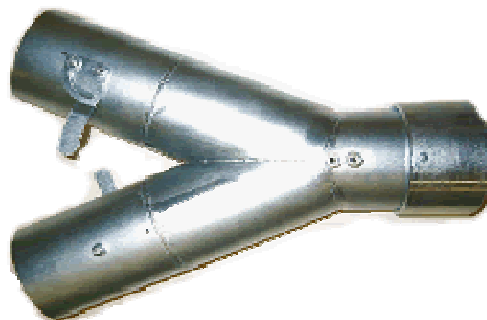


## FLEXIBLE BLACK HOSE MEDIUM TEMPERATURES

**For connection DRYER/HOPPER**

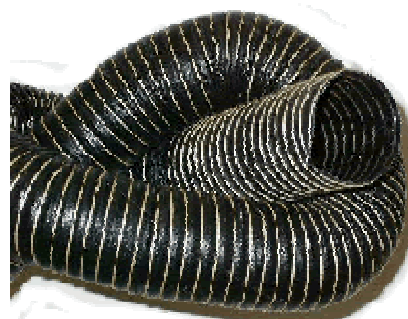

## FLEXIBLE RED HOSE HIGH TEMPERATURES

**For connection DRYER/HOPPER**

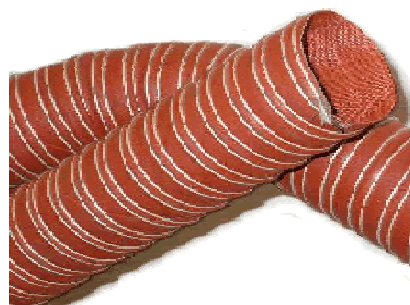

## FLEXIBLE INSULATED RED HOSE HIGH TEMPERATURES

**For connection DRYER/HOPPER**



## 1-WAY STAINLESS STEEL TAKE OFF VALVE VA1


### Standard equipment:

Material pipe connection: D.40-50-60

Stainless steel body, insulation thickness 30mm

Suction port with cartridge filter

Material discharge door

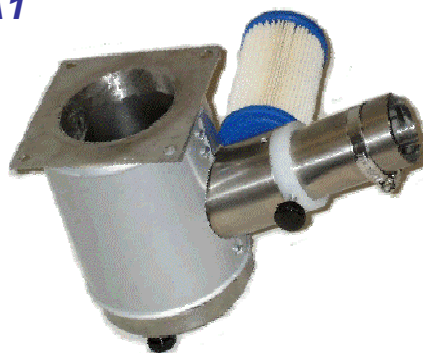

## 2-WAY STAINLESS STEEL TAKE OFF VALVE VA2

### Standard equipment:

Material pipe connection: D.40-50-60

Stainless steel body, insulation thickness 30mm

Suction ports with cartridge filter

Material discharge door



## 3-WAY STAINLESS STEEL TAKE OFF VALVE VA3

### Standard equipment:

Material pipe connection: D.40-50-60

Stainless steel body, insulation thickness 40mm

Suction ports with cartridge filter

Material discharge door



## SUCTION PROBE SINGLE PIPE

*Stainless steel hose AISI304 construction*

*Dia> 40, 50 or 60mm*





## SUCTION PROBE DOUBLE PIPE

*Chrome steel construction*

*Dia> 40,50 or 60mm*



## ANTISTATIC POLYURETHANE FLEXIBLE HOSE

*Dia> 40, 50 or 60mm (other diameters available on request)*



## FILTER CARTRIDGES & HOUSINGS

*Standard filters 10 micron (fine filters 2 & 4 micron)*



PL MACHINERY SERVICES & SALES LTD  
UNIT A3/A4 BARTON INDUSTRIAL ESTATE, FALDO ROAD,  
BARTON LE CLAY, BEDFORDSHIRE, MK45 4RP

TEL: 01582 883666 / EMAIL: [sales@plmachinery.com](mailto:sales@plmachinery.com)